

Mi·Light[®]
User Instruction

15W RGB+CCT LED Downlight
Model No.: FUT067

Features



RGB+CCT
16 Millions of colors to choose



Color temperature
2700~6500K



Dimmable
Saturation control



2.4GHz
Radio Frequency



Remote control
Control distance 30m



Smart phone App control
Mi-Light WiFi iBox is needed



Made in China

Parameters

Model No.: FUT067

Power: 15W

Input Voltage: AC86~265V / 50~60Hz

Color Temperature: 2700K~6500K

Luminous Flux: 1300LM

Light Efficiency: 88LM/W

CRI: >80


PF: >0.5

Lifespan: 50000 hours

Beam Angle: 120°





Hole Size: \varnothing 130~140mm

Material: Aluminum+PC Cover

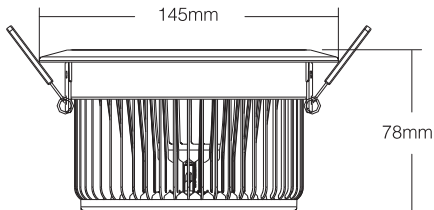

Instructions

1. Please open the hole on the ceiling according to the correct size of Diagram 1.
2. Push in the two spring elements, make sure that they are deployed and anchored on the back of the ceiling Diagram 2 and 3.
3. Connect the driver properly according to the wire connection Diagram 4.




Link / Unlink


Compatible with FUT089 / FUT092 remote controls
(Purchased separately)

Link: Switch off the power, then switch on again after 5 seconds, press " | " 3 times within 3 seconds; the light will blink 3 times slowly when it is done.

Unlink: Switch off the power, then switch on again after 5 seconds, press corresponding " | " or master ON button 5 times within 3 seconds; the light will blink 10 times quickly when it is done.

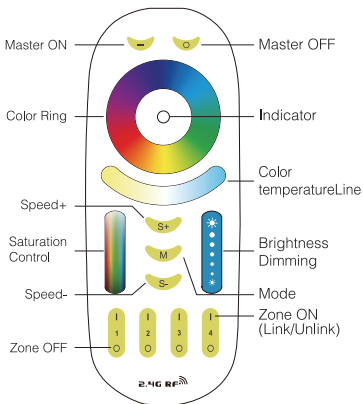

FUT092

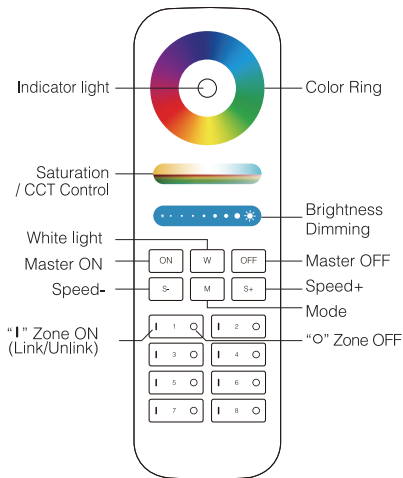

FUT089

Caution

- Amateur do not dismantle and install the light.
- Users must be correct, strict and solid to install the light; do not use the light on strenuous vibration area.