



Coreline tempo large

BVP130 LED120-4S/740 S

CORELINE TEMPO LARGE - LED module 12000 lm - 4th generation, screw fixation - 740 neutral white - Symmetrical

CoreLine tempo large is a highly efficient range of floodlights designed for 1:1 retrofit replacement of conventional technology, while retaining the same electrical installation and poles. A limited range of options makes it easy to find the best lux-for-lux replacement. The easy-to-install CoreLine tempo large offers lumen packages for many different application areas as well as a choice of high-performance asymmetrical and symmetrical optics. U-shaped universal mounting bracket and external quick 3-poles IP68 connector.

Product data

General Information			
Number of light sources	40 [40 pcs]	UL mark	-
Lamp family code	LED120 [LED module 12000 lm]	Warranty period	3 years
Lamp version	4S [4th generation, screw fixation]	Outdoor optic type	Symmetrical
Light source colour	740 neutral white	RAL colour	Gray aluminum (9007)
Light source replaceable	Yes	Constant light output	No
Number of gear units	1 unit	Spare parts available	Yes
Driver/power unit/transformer	PSU [Power supply unit]	Number of products on MCB	1
Driver included	Yes	Lifecycle services	Maintenance services
Optical cover/lens type	FG [Flat glass]	Photobiological risk	Risk group 1
Luminaire light beam spread	70° x 21°	Product recyclability	95%
Connection	CE [External connector]	RoHS mark	RoHS mark
Protection class IEC	Safety class I (I)	WEEE mark	WEEE mark
Flammability mark	F [For mounting on normally flammable surfaces]	LED engine type	LED
CE mark	CE mark	Accessory PFC	N/A
ENEC mark	ENEC mark	Product Family Code	BVP130 [CORELINE TEMPO LARGE]

Coreline tempo large

Light Technical

Upward light output ratio	0
Standard tilt angle post-top	0°
Standard tilt angle side entry	0°

Operating and Electrical

Input voltage	220 to 240 V
Input frequency	50 to 60 Hz
Inrush current	53 A
Inrush time	0.3 ms
Driver current	1000 mA
Power factor (min.)	0.9

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Housing material	Aluminum die-cast
Reflector material	Acrylate
Optic material	Polymethyl methacrylate
Optical cover/lens material	Glass
Fixation material	Aluminum
Mounting device	MBA [Mounting bracket adjustable]
Optical cover/lens shape	Flat
Optical cover/lens finish	Clear
Overall length	483 mm
Overall width	365 mm
Overall height	40 mm
Effective projected area	0.15 m ²

Approval and Application

Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. Impact protection code	IK08 [5 J vandal-protected]

Initial Performance (IEC Compliant)

Initial luminous flux	12000 lm
Luminous flux tolerance	+/-7%
Initial LED luminaire efficacy	129 lm/W
Init. Corr. colour temperature	4000 K
Init. colour rendering index	>70
Initial chromaticity	(0.382, 0.379) SDCM <3
Initial input power	93 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Driver failure rate at 5,000 hours	0.5 %
Abrupt failure value at L80B10	3.4 %
Useful life L80B10	70000 h
Lumen maintenance at useful life of 100,000 h, at 25 °C	93


Application Conditions

Ambient temperature range	-40 to +35 °C
Average ambient temperature	25 °C

Product Data

Full product code	871869909725700
Order product name	BVP130 LED120-4S/740 S
EAN/UPC – product	8718699097257
Order code	09725700
Numerator – quantity per pack	1
Numerator – packs per outer box	1
Material no. (12NC)	912300023682
Net weight (piece)	7.500 kg


Dimensional drawing




CoreLine Tempo BVP110/120/125/130/140

Coreline tempo large

Photometric data

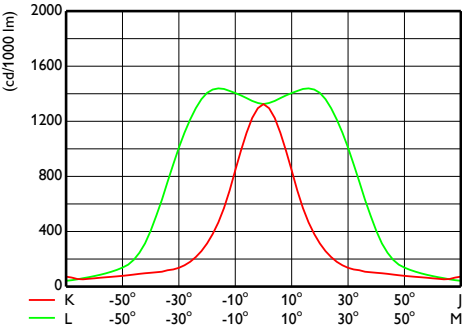

OFCS1_BVP1301xLED120-4S740S



OFPC1_BVP1301xLED120-4S740S

